



UNITED STATES DEPARTMENT OF COMMERCE
National Oceanic and Atmospheric Administration
NATIONAL MARINE FISHERIES SERVICE
Alaska Fisheries Science Center
Resource Assessment and Conservation Engineering Division
7600 Sand Point Way Northeast
BIN C15700, Building 4
Seattle, Washington 98115-0070

June 14, 1995

F/AKC1:DB

PRELIMINARY CRUISE RESULTS

NOAA SHIP MILLER FREEMAN, CRUISE NO. 95-01
COMBINED ECHO INTEGRATION-TRAWL SURVEY OF WALLEYE POLLOCK
IN THE GULF OF ALASKA, AND PMEL/FOCI MOORING DEPLOYMENTS IN
THE BERING SEA AND GULF OF ALASKA

CRUISE PERIOD, AREA, AND SCHEDULE

Scientists from the Alaska Fisheries Science Center (AFSC) and the Pacific Marine Environmental Laboratory (PMEL) conducted a research survey aboard the NOAA vessel Miller Freeman from February 12-24, 1995, for a total of 13 sea days. The cruise began in Kodiak, Alaska, and ended in Dutch Harbor, Alaska. Scientists from AFSC conducted an echo integration-trawl (EIT) survey of walleye pollock (Theragra chalcogramma) in the Shumagin Islands, Gulf of Alaska (GOA). Scientists from PMEL conducted mooring deployments/recovery in the GOA, and mooring deployments on the eastern Bering Sea (EBS) shelf.

The itinerary for the NOAA ship Miller Freeman follows:

Feb 12	Embark scientists in Kodiak
Feb 12-13	Conduct sphere calibration in Ugak Bay; transit to Shumagin Islands area
Feb 14-20	Conduct EIT survey of Shumagin Islands area, and recover/deploy Pavlof Island mooring
Feb 20-23	Deploy 3 Unimak Pass and 2 EBS moorings, and occupy Unimak CTD stations
Feb 23-24	Conduct Atka mackerel groundfish experiment; transit to Dutch Harbor; disembark scientists; end of cruise

OBJECTIVES

The principal objectives of the cruise are divided into those of the Acoustics Group and those of other groups.

The objectives of the Acoustics Group were to:



1. collect echo integrator data and midwater and demersal trawl data necessary to determine the distribution, biomass, and biological composition of walleye pollock in the Shumagin Islands area;
2. collect pollock target strength data for use in scaling the echo integration data to estimates of absolute abundance;
3. calibrate the 38 kHz and 120 kHz scientific acoustic systems using standard sphere techniques;
4. collect various meteorological and physical oceanographic data including vertical profiles of temperature and salinity at selected sites, and continuous monitoring of near-surface currents, temperature, salinity, light levels, etc.;
5. collect stomach samples from arrowtooth flounder (Atheresthes stomias), Pacific cod (Gadus macrocephalus), and non-spawning walleye pollock (Theragra chalcogramma); and
6. collect age-0 walleye pollock (Theragra chalcogramma) for stomach contents analysis.

The objective of the FOCI Group was to recover/deploy surface moorings at various locations in the study area.

The objective of the RACE Groundfish Group was to ascertain the feasibility of using acoustic methods to characterize Atka mackerel (Pleurogrammus monopterygius) aggregations.

VESSEL, ACOUSTIC EQUIPMENT, AND TRAWL GEAR

The survey was conducted on board the NOAA ship Miller Freeman, a 65.5 m (216-foot) stern trawler equipped for fisheries and oceanographic research. Acoustic data were collected with a quantitative echo sounding system (Simrad EK500¹). The Simrad 38 kHz and 120 kHz split-beam transducers were mounted on the bottom of the vessel's centerboard. The 38 kHz transducer was used for the primary data collection. With the centerboard fully extended, the transducers were 9 m below the water surface. System electronics were housed in a portable laboratory mounted on the vessel's weather deck. Data from the Simrad EK500 echo sounder/receiver were stored and processed using the Simrad BI500 echo-integration and target strength data collection and analysis software on a SUN workstation.

Midwater echosign was sampled using a modified Northern Gold midwater rope trawl (NET Systems, Inc., Bainbridge Island, Washington). The trawl was constructed with ropes in the forward

¹Reference to trade names or commercial firms does not constitute U.S. government endorsement.

section and stretch mesh sizes ranging from 163 cm (64 in) immediately behind the rope section to 8.9 cm (3.5 in) in the codend. It was fished in a bridleless configuration and was fitted with a 3.2-cm (1.25-in) mesh codend liner. Length of the headrope was 94.5 m (310 ft) when measured between the attachment points at the breastline. Length of the footrope was 50 m (164 ft) when measured between the tom weight attachment points. The breastlines measured 79.4 m (260.5 ft). The net was fished with 1.8-m X 2.7-m (6-ft X 9-ft) steel V-doors [1000-kg (2200-lb)], and 227-kg (500-lb) tom weights on each side. Vertical net opening, depth, and temperature at depth were monitored with a Furuno wireless netsounder system attached to the headrope of the trawl.

Fish on and near bottom were sampled with a polyethylene Nor'eastern high opening bottom trawl equipped with roller gear. The trawl was constructed with stretch mesh sizes that ranged from 13 cm (5 in) in the forward portion of the net to 8.9 cm (3.5 in) in the codend. It was fitted with a nylon codend liner with a mesh size of 3.2 cm (1.25 in). The 27.2-m (89.1-ft) headrope held 21 floats [30-cm (12-in) diameter]. A 24.7-m (81-ft) chain fishing line was attached to the 24.9-m (81.6-ft) footrope which was constructed of 1-cm (0.4-in) 6-ft x 9-ft wire rope wrapped with polypropylene rope. The 24.2-m (79.5-ft) roller gear was constructed with 36-cm (14-in) rubber bobbins spaced 1.5-2.1 m (5-7 ft) apart. A solid string of 10-cm (4-in) rubber disks separated some of the bobbins in the center section of the roller gear. Two 5.9-m (19.5-ft) wire rope extensions with 10-cm (4-in) and 20-cm (8-in) rubber disks were used to span the two lower flying wing sections, and were attached to the roller gear. The roller gear was attached to the fishing line using chain toggles [2.9 kg (6.5 lbs) each] which were comprised of 5 links and 1 ring. The trawl was rigged with triple 54.9-m (180-ft) galvanized wire rope dandylines. Again, the net was fished with 1.8-m X 2.7-m (6-ft X 9-ft) steel V-doors [1000-kg (2200-lb)], and vertical net opening, depth, and temperature at depth were monitored with a Furuno wireless netsounder system attached to the headrope of the trawl.

Vertical profile measurements of water temperature and salinity were collected at 12 trawl stations and the calibration site using a Sea-Bird CTD (conductivity/temperature/depth) Seacat system. Temperature profile data were collected at two sites using expendable bathythermographs (XBT). Additional temperature and depth data were collected using a microbathythermograph (MBT) attached to the headrope of four selected trawls. The acoustic Doppler current profiler was slaved to the EK500 and operated continuously throughout the cruise in the water profiling mode.

SURVEY METHODS

An EIT survey was conducted in the Shumagin Islands area to assess the pollock's distribution, abundance, and biological characteristics. The parallel survey transect spacing was 9.3 km (5 nmi) within the Shumagin Gully, 3.7 km (2 nmi) north of the Shumagin Islands, and 7.4 km (4 nmi) elsewhere (Fig. 1). Bottom depths rarely exceeded 250 m along any transect.

Survey operations were conducted 24 hours a day. Vessel speed averaged approximately 11 kts while running transects, although it varied between 6 and 13 kts depending upon weather conditions. The acoustic system was used to collect echo-integration and *in situ* target strength data during survey operations. Estimates of absolute pollock abundance will be derived from the former data after they are appropriately scaled.

Midwater and bottom trawl hauls were made at selected locations to identify echosign and provide biological samples during the survey. The average trawling speed was approximately 3 kts. The vertical net opening for the midwater rope trawl averaged about 23 m (range 13-28 m). The Poly Nor'eastern trawl vertical mouth opening was about 10 m. Standard catch sorting and biological sampling procedures were used to provide weight and number by species for each haul. Pollock were further sampled to determine sex, fork length (FL), age, maturity, and body and ovary weights. An electronic scale was used to determine all weights taken from individual pollock specimens. Fish lengths were taken with a Polycorder measuring device (combination hand-held computer and bar code reader). Age-0 pollock were frozen for stomach contents analysis.

PRELIMINARY RESULTS

Standard Sphere Calibrations

Standard sphere calibrations were conducted on four separate occasions before, during, and after the cruise (Table 1). The 38 kHz and 120 kHz acoustic systems were both calibrated each time. For calibration, the NOAA ship Miller Freeman was anchored fore and aft in 74-110 m of water. Acoustic properties of two copper spheres (60 mm for the 38 kHz; 23 mm for the 120 kHz) were measured. The 60 mm sphere has a known target strength of -33.6 dB; the target strength of the 23 mm sphere is -40.3 dB. Both spheres were suspended below the transducer with the smaller sphere suspended 5 m above the large one. Split-beam target strength and echo-integration data collected with the Simrad EK500 system described acoustic system gain parameters and transducer beam pattern characteristics. No significant differences in gain parameters or transducer beam pattern characteristics for the 38 kHz system were observed among any of the four calibrations. For the 120 kHz system, SV gain dropped 1 dB and TS gain dropped 0.8 dB between the first and third

calibrations, then remained unchanged between the third and fourth calibrations. Collection parameters for MF95-01 were derived from the second calibration.

EIT Survey

Approximately 1,602 km (865 nmi) of acoustic tracklines and 14 hauls were completed during February 14-20. A distributional plot of the acoustic backscattering attributed primarily to pollock for this survey is presented in Fig. 2. Pollock echosign was observed throughout the study area, although most fish were concentrated immediately to the northeast of the Shumagin Islands near Renshaw Point and Stepovak Bay. Significant quantities of fish were also detected within the Shumagin Gully. Other localized areas with moderate pollock echosign were the deeper areas in West Nagai Strait, and off Swedania Point. Most echosign was generally within 75 m of the bottom, although tight, spatially-discrete aggregations of pollock were also observed in mid-water in some areas (e.g. Shumagin Gully). Pollock echosign was rarely detected over bottom depths less than 100 m (Fig. 3).

Biological data were collected at 14 trawl locations. Trawl station and catch data are summarized for all hauls in Table 2. Biological data collected for pollock are tallied in Table 3. A total of 14 successful CTD casts (Table 4), 1 successful XBT cast (Table 5), and 3 successful MBT casts (Table 6) were made. Additional CTD casts were made by the PMEL/FOCI group at the mooring deployment locations as well as at other locations (see FOCI Results).

Biological data were collected at 13 midwater trawl locations (Table 7), and 1 bottom trawl location (Table 8) during the survey. Pollock accounted for more than 98% of the catch. Age-1 pollock were observed along with adult pollock in the Shumagin Gully region in hauls 1, 2, 3, and 5. The size distributions for age-1 pollock ranged between 8-13 cm FL with a modal length of 11 cm. Outside the Shumagin Gully region, pollock size distributions were strongly unimodal. These adult pollock ranged between 37-69 cm FL with a modal length centered near 48 cm (Fig. 4).

A total of 1,515 pollock, 794 males and 721 females, were sampled for maturity from the 14 trawl hauls. The percentage of mature, prespawning fish for each sex was 81%. Only 8% of the males and 2% of the females were actively spawning (Fig. 5). The gonadosomatic index (GSI: gonad weight/total body weight) for mature, pre-spawning females was 0.12 (Fig. 6).

PMEL/FOCI Operations

During the cruise three bongo casts were conducted. The purpose of these casts was to determine if there were any pollock eggs in the water column (Shumagins only) and to collect calanoid

copepods for DNA analyses. The 60 cm bongo frame with 333 μm mesh was used. A Sea-Bird Seacat was attached to the winch wire above the bongo frame. Bongo casts were taken to within approximately 10 m of the bottom. When the SCS system supported the Seacat, the Seacat transmitted pressure, temperature and conductivity in real-time and recorded data internally. The bongo sites were near the Shumagin Islands, mooring F-95BSS1, and mooring F-95BSS2. One sample from each cast was preserved in formalin; the other sample in pure, non-denatured (200 proof) alcohol.

A total of eighteen CTDs were conducted using the PMEL Sea-Bird CTD (real-time) and the Acoustic Group's Sea-Bird CTD (internally recording). At nine of the CTD stations, data from an analog CHLAM (chlorophyll absorption meter) were also recorded. A CTD cast was conducted before the recovery and after the deployment of each mooring (an exception is the Pavlof Bay mooring--the AFSC Kodiak Lab requested XBTs instead of CTDs). CTD casts were taken to within approximately 7 m of the bottom. Due to a problem with the port winch, and to expedite operations, the Acoustics Group's internally recording Sea-Bird CTD was used at the Unimak Pass mooring sites. Salinity samples were collected at eighteen stations and reversing thermometers at seven stations to obtain calibration data for the PMEL CTD.

A total of six moorings were deployed. Three were located in a line across Unimak Pass (F-95UP-1, F-95UP-2, F-95UP-3), one northeast of Unimak Pass (F-95BSS-1), one on the southwest Bering Sea slope (F-95BSS-3), and one in Pavlof Bay (for the NMFS Kodiak Crab Lab). The Unimak Pass moorings all have Seagauges mounted on the anchor; in addition, the center Unimak Pass mooring has an Aanderaa current meter located 10 m above the bottom. The center Unimak Pass mooring was deployed in 79 m; the outer Unimak Pass moorings were deployed in 64 to 66 m. The F-95BSS-1 and F-95BSS-3 moorings are 600 KHz and 150 KHz Acoustic Doppler Current Profilers respectively, in a bottom mounted trawl resistant cage. Each of these two moorings has a Seacat with tubing which collects water 5 m above the cage and then pumps the water down to the Seacat sensors. These particular Seacats measure conductivity and temperature, but not pressure. F-95BSS-1 was deployed in 68 m, while F-95BSS-3 was deployed in 124 m. The Pavlof Bay mooring consists of three TempMentor Sensors (18, 58, 96 m). An XBT was done after the deployment of the Pavlof Bay mooring. All deployments occurred without incident.

A mooring located at Pavlof Bay was recovered. The mooring had been deployed on JD 050, 1994 by PMEL/MILLER FREEMAN for the AFSC Kodiak Lab. It has three TempMentor sensors (21, 66, and 99 m). The sensors were given to CST Bill Floering for return to P. Anderson/AFSC Kodiak Lab. An XBT was done prior to the mooring recovery.

RACE Groundfish Operations

The RACE Groundfish task conducted an investigatory set of transects and tows to test the feasibility of using the EK-500 to detect Atka mackerel.

Twenty-one zig-zag transects, totaling 129.6 km (70 nmi), were run across a ridge of the continental shelf from 9.3 km-18.5 km (5 nmi-10 nmi) north of Akun Island, perpendicular to bathymetric contours at depths from 80 m-150 m. This area and depth range were typical of historic Atka mackerel fishery activity in the area. The transect period was timed to overlap the end of a high current period associated with a strong ebb tide, its subsequent slack tide period and the beginning of the following weaker flood tide. Three major echosign types were observed: non-contiguous aggregations within 3 m-5 m of the bottom, weak and sporadic near-bottom echosign, and diffuse, relatively uniformly distributed low density sign within 25 m-75 m of the bottom. After completing 15 transects, some transects were replicated. During the replication set, one tow was conducted on each sign type.

The standard Poly Nor'eastern bottom trawl was used for the first tow, on scattered high density sign. An estimated 19,000 kg of Atka mackerel was caught during this ten minute tow. The net was severely damaged during the tow and total catch could have been considerably larger, but was inestimable due to large holes in the intermediate of the net. Approximately 550 kg of northern and dusky rockfish, 170 kg of Pacific cod and 30 kg of other groundfish were also present in the catch. The acoustical sign observed at this site did not appear to account for this very high density of Atka mackerel, but further observations will be necessary to clarify the relation of echosign to Atka mackerel abundance.

A second Poly Nor'eastern bottom trawl was used for the subsequent tow over bottom with little or no acoustical sign. The duration was reduced to two minutes due to damage to the other bottom net. Less than 15 kg of fish were caught in this tow, including two Atka mackerel.

The mid-water rope trawl was used for the final tow through profuse low density sign, which was assumed to be primarily smaller pelagic organisms. A twenty-one minute tow produced less than 280 kg of fish, of which 99% were Pacific cod and walleye pollock. No Atka mackerel were caught in this mid-water tow.

SCIENTIFIC PERSONNEL

<u>Name</u>	<u>Sex/ Nationality</u>	<u>Position</u>	<u>Organization</u>
Chris Wilson	M/USA	Chief Scientist	AFSC
Dan Twohig	M/USA	Electronics Tech.	AFSC
Taina Honkalehto	F/USA	Fish. Biologist	AFSC
Dennis Benjamin	M/USA	Fish. Biologist	AFSC
Robin Harrison	M/USA	Fish. Biologist	AFSC
Carol DeWitt	F/USA	Field Oper. Spec.	PMEL
Carrie Hadden	F/USA	Field Oper. Spec.	PMEL

AFSC - Alaska Fisheries Science Center, Seattle, Washington
 PMEL - Pacific Marine Environmental Laboratory, Seattle, Washington
 FOCI - Fisheries-Oceanography Coordinated Investigations, Seattle, Washington

For further information contact Dr. Gary Stauffer, Director, Resource Assessment and Conservation Engineering Division, Alaska Fisheries Science Center, National Marine Fisheries Service, 7600 Sand Point Way Northeast, Building 4, BIN C15700, Seattle, Washington 98115-0070. Telephone (206) 526-4170.

Table 1. Summary of sphere calibrations conducted during the field season of the winter 1995 echo integration-trawl surveys of walleye pollock.

Date (AST)	Location	Freq kHz	Water Temp (C)		Sphere Range from Transducer (m)	TS Gain	SV	3db Beam Width	Angle Offset	
			at Transducer*	at Sphere					Along	Athwart
26 Jan 95	Port Susan	38	8.4	9.1	23.9	27.3	27.1	7.13	-0.10	-0.06
		120	8.4	9.0	19.5	24.9	25.1	8.81	-0.62	-0.14
13 Feb 95	Ugak Bay	38	3.7	3.5	26.7	27.3	27.1	7.16	-0.12	-0.05
		120	3.7	3.5	21.9	24.5	24.5	8.81	-0.73	-0.04
08 Mar 95	Skan Bay	38	3.0	3.0	26.7	27.3	27.1	7.13	-0.14	-0.05
		120	3.0	3.0	22.2	24.1	24.1	9.29	-0.85	-0.40
13 Apr 95	Anderson Bay	38	2.9	2.8	26.2	27.3	27.1	7.14	-0.09	-0.06
		120	2.9	2.8	21.4	24.1	24.1	9.36	-0.54	-0.72

* The transducer is located approximately 9 m below the water surface.

Note: Gain and beam pattern terms are defined in the "Operator Manual for Simrad EK500 Scientific Echo Sounder (1993)" available from Simrad Subsea A/S , Standpromenaden 50, P.O. Box 111 N-3191 Horten, Norway.

Table 2. Summary of trawl stations and catch data during the winter 1995 echo integration-trawl survey of walleye pollock in the Shumagin Islands area, MF 95-01.

Haul No.	Date (1995)	Gear ** Type	Time (GMT)	Start Position		Depth (m)		Temp (C) Surface	Pollock		Other		
				Latitude (N)	Longitude (W)	Gear	Bottom		Weight (kg)	Numbers	Weight (kg)	Numbers	
1	Feb 15	R	0636-0709	54 59.16	158 41.46	104	126	3.8	2.8	299.50	406	47.60	13
2	Feb 15	R	1125-1155	55 07.03	158 46.00	136	204	3.4	2.9	272.70	325	5.10	7
3	Feb 15	R	1259-1329	55 08.43	158 45.23	185	203	4.3	2.7	617.70	1,224	5.40	278
4	Feb 15	R	0202-0232	55 16.20	158 57.56	118	199	3.5	2.9	3,522.30	4,212	4.70	14
5	Feb 16	R	1206-1211	55 19.18	159 24.40	167	196	4.4	2.5	1,600.80	2,140	181.20	6,037
6	Feb 16	R	1904-1908	55 15.32	159 37.04	106	134	--	2.5	2,974.90	3,441	106.90	19
7	Feb 17	R	0137-0144	55 26.71	159 49.71	125	150	3.5	3.0	3,432.20	3,806	86.00	13
8	Feb 17	B	0848-0850	55 27.31	160 33.63	144	144	2.8	2.1	1,576.30	1,866	27.70	75
9	Feb 18	B	0220-0222	55 32.99	160 07.45	131	176	2.6	2.3	2,780.90	3,404	--	--
10	Feb 18	B	1328-1334	55 39.77	159 46.26	102	120	--	2.0	564.50	620	5.80	1
11	Feb 18	R	1918-1948	55 45.79	159 45.66	95	127	2.8	1.5	1,870.30	2,191	11.50	6
12	Feb 18	R	2334-2337	55 34.85	160 07.63	114	179	2.6	1.8	2,367.50	2,718	5.20	3
13	Feb 19	R	1145-1215	55 02.62	160 22.55	123	148	2.7	1.9	1,882.30	2,298	25.70	8
14	Feb 20	R	1436-1450	54 47.70	160 18.85	73	91	3.8	1.9	1,133.00	1,330	19.00	5

** R = midwater rope trawl and B = Poly Nor'eastern bottom trawl

Table 3. Summary of biological samples and measurements collected during the 1995 winter walleye pollock echo integration-trawl survey of the Shumagin Islands, MF 95-01.

HAUL	LENGTH FREQUENCY	MATURITY	OTOLITHS	BODY WT	OVARY WT	STOMACH COLLECTION	AGE-0 POLLOCK
1	404	124	124	124	49	30	49
2	325	108	108	108	45	20	2
3	299	61	61	61	27	--	53
3	53	--	--	--	--	--	--
4	373	119	119	119	41	20	4
5	308	117	117	117	44	19	59
5	52	10	10	10	--	--	--
5	71	--	--	--	--	--	--
6	310	109	109	109	33	37	--
7	351	99	99	99	48	31	--
8	305	113	113	113	35	40	--
9	370	100	100	100	31	20	--
10	290	112	112	112	62	20	--
11	388	98	98	98	32	20	--
12	364	111	111	111	42	20	--
13	342	110	110	110	26	25	--
14	326	124	124	124	63	24	--
Totals	4,605	1,515	1,515	1,515	578	326	163

Table 4. Summary of CTD casts conducted during the winter 1995 echo integration-trawl survey of walleye pollock in the Shumagin Islands area, MF 95-01.

Cast	Haul	Date (1995)	Time (GMT)	Position		Depth (m)		Transect
				Latitude (N)	Longitude (W)	Gear	Bottom	
1	calibration	Feb 14	0252	57 29.6	152 51.6	62	70	Ugak Bay
2	calibration	Feb 14	0304	57 29.6	152 51.6	62	70	Ugak Bay
3	1	Feb 15	0705	55 01.2	158 39.5	130	151	1.0
4	1	Feb 15	0804	55 0.16	158 39.9	150	151	1.0
5	2,3	Feb 15	1433	55 07.3	158 45.2	192	204	2.0
6	4	Feb 16	0401	55 16.1	158 57.4	177	198	5.0
7	4	Feb 16	0421	55 16.1	158 57.5	185	195	5.0
8	5	Feb 16	1317	55 19.3	159 24.4	178	194	7.0
9*	6	Feb 16	2050	55 15.4	159 37.0	--	129	8.0
10	7	Feb 17	0246	55 26.8	159 48.3	140	152	10.0
11*	8	Feb 17	0958	55 27.3	160 33.7	--	142	13.1
12	9	Feb 18	0320	55 33.4	160 08.0	161	178	26.0
13	11	Feb 18	2055	55 47.5	159 45.6	108	124	35.0
14	12	Feb 19	0148	55 35.1	160 08.3	156	169	35.0
15	13	Feb 19	1310	55 04.4	160 22.6	153	171	40.0
16	14	Feb 20	1550	54 48.4	160 19.3	80	90	48.0

* Cast was unsuccessful.

Table 5. Summary of XBT casts conducted during the winter 1995 echo integration-trawl survey of walleye pollock in the Shumagin Islands area, MF 95-01.

Drop	Haul	Date (1995)	Time (GMT)	Position		Depth (m)	Transect	Probe
				Latitude (N)	Longitude (W)			
1*	8	Feb 17	1646	55 27.9	160 32.3	--	21.0	T-10
2	8	Feb 17	1939	55 27.4	160 33.8	134	23.0	T-10

Table 6. Summary of MBT casts conducted during the winter 1995 echo integration-trawl survey of walleye pollock in the Shumagin Islands area, MF 95-01.

Drop	Haul	Date (1995)	Time (GMT)	Position		Depth (m)		Transect	Trawl Type
				Latitude (N)	Longitude (W)	MBT Cast	Bottom		
1*	1	Feb 15	0636	54 59.2	158 41.5	--	126	1.0	Rope
2	11	Feb 18	1918	55 45.8	159 45.7	99	127	35.0	Rope
3	12	Feb 18	2334	55 34.9	160 07.6	118	179	35.0	Rope
4	13	Feb 19	1145	55 02.6	160 22.6	127	148	40.0	Rope

* Cast was unsuccessful.

Table 7. Summary of catch by species from 13 tows conducted in midwater during the 1995 winter walleye pollock echo integration-trawl of the Shumagin Islands, MF 95-01.

Common Name	Scientific Name	Weight (kg)	Weight (%)	Numbers
Walleye Pollock	<i>Theragra chalcogramma</i>	23,318.5	97.9	28,114
Pacific Cod	<i>Gadus macrocephalus</i>	309.0	1.3	59
Eulachon	<i>Thaleichthys pacificus</i>	173.3	0.7	6,129
Smooth Lumpsucker	<i>Aptocyclus ventricosus</i>	14.6	0.1	8
Arrowtooth Flounder	<i>Atheresthes stomias</i>	2.0	<.1	1
Chinook Salmon	<i>Oncorhynchus tshawytscha</i>	1.5	<.1	1
Rock Sole	<i>Pleuronectes bilineatus</i>	1.0	<.1	1
Jellyfish Unidentified	Scyphozoa	0.9	<.1	4
Capelin	<i>Mallotus villosus</i>	0.8	<.1	126
Flathead Sole	<i>Hippoglossoides elassodon</i>	0.7	<.1	2
Squid Unidentified	<i>Teuthoidea</i>	0.2	<.1	33
Salps Unidentified	<i>Asciacea</i>	0.1	<.1	-
Northern Pink Shrimp	<i>Pandalus borealis</i>	<.1	<.1	12
Sturgeon Poacher	<i>Podothecus acipenserinus</i>	<.1	<.1	1
Sidestripe Shrimp	<i>Pandalopsis dispar</i>	<.1	<.1	1
Totals		23,822.6	100.0	

Table 8. Summary of catch by species from 1 bottom trawl during the 1995 winter walleye pollock echo integration-trawl survey of the Shumagin Islands, MF 95-01.

Common Name	Scientific Name	Weight (kg)	Percent	Numbers
Walleye Pollock	<i>Theragra chalcogramma</i>	1,576.3	98.3	1,866
Arrowtooth Flounder	<i>Atheresthes stomias</i>	15.3	0.9	42
Flathead Sole	<i>Hippoglossoides elassodon</i>	5.7	0.4	23
Pacific Halibut	<i>Hippoglossus stenolepis</i>	4.5	0.3	5
Smooth Lumpsucker	<i>Aptocyclus ventricosus</i>	1.2	0.1	1
Alaska Plaice	<i>Pleuronectes quadrituberculatus</i>	0.4	0.0	1
Starry Flounder	<i>Platichthys stellatus</i>	0.4	0.0	1
Sturgeon Poacher	<i>Podothecus acipenserinus</i>	0.1	0.0	1
Spinyhead Sculpin	<i>Dasycottus setiger</i>	<.1	0.0	1
Totals		1,603.9	100.0	

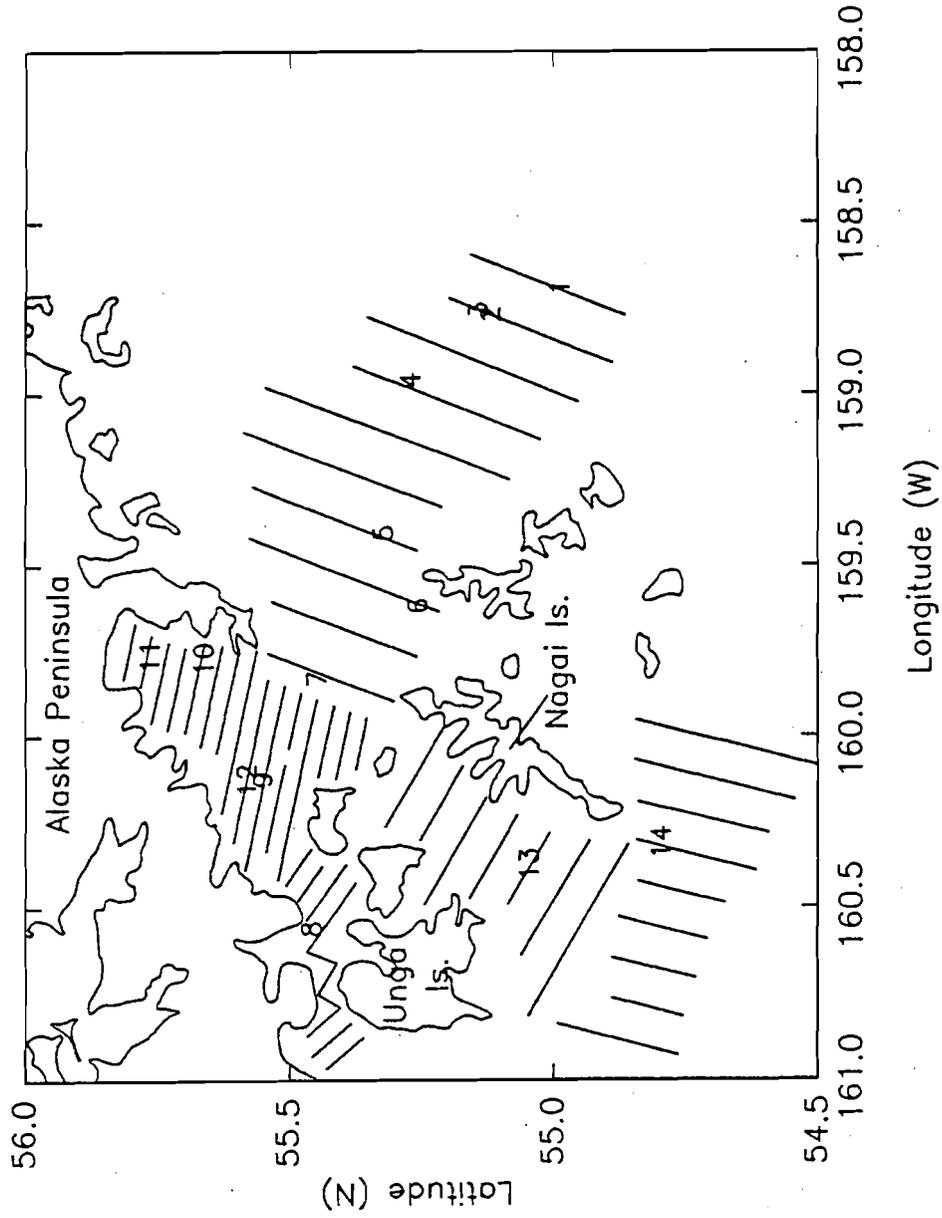


Figure 1. Survey transects covered during the winter 1995 echo integration-trawl survey of walleye pollock in the Shumagin Islands, area, MF 95-01. Numbers represent trawl haul positions. Cross-transects are not shown.

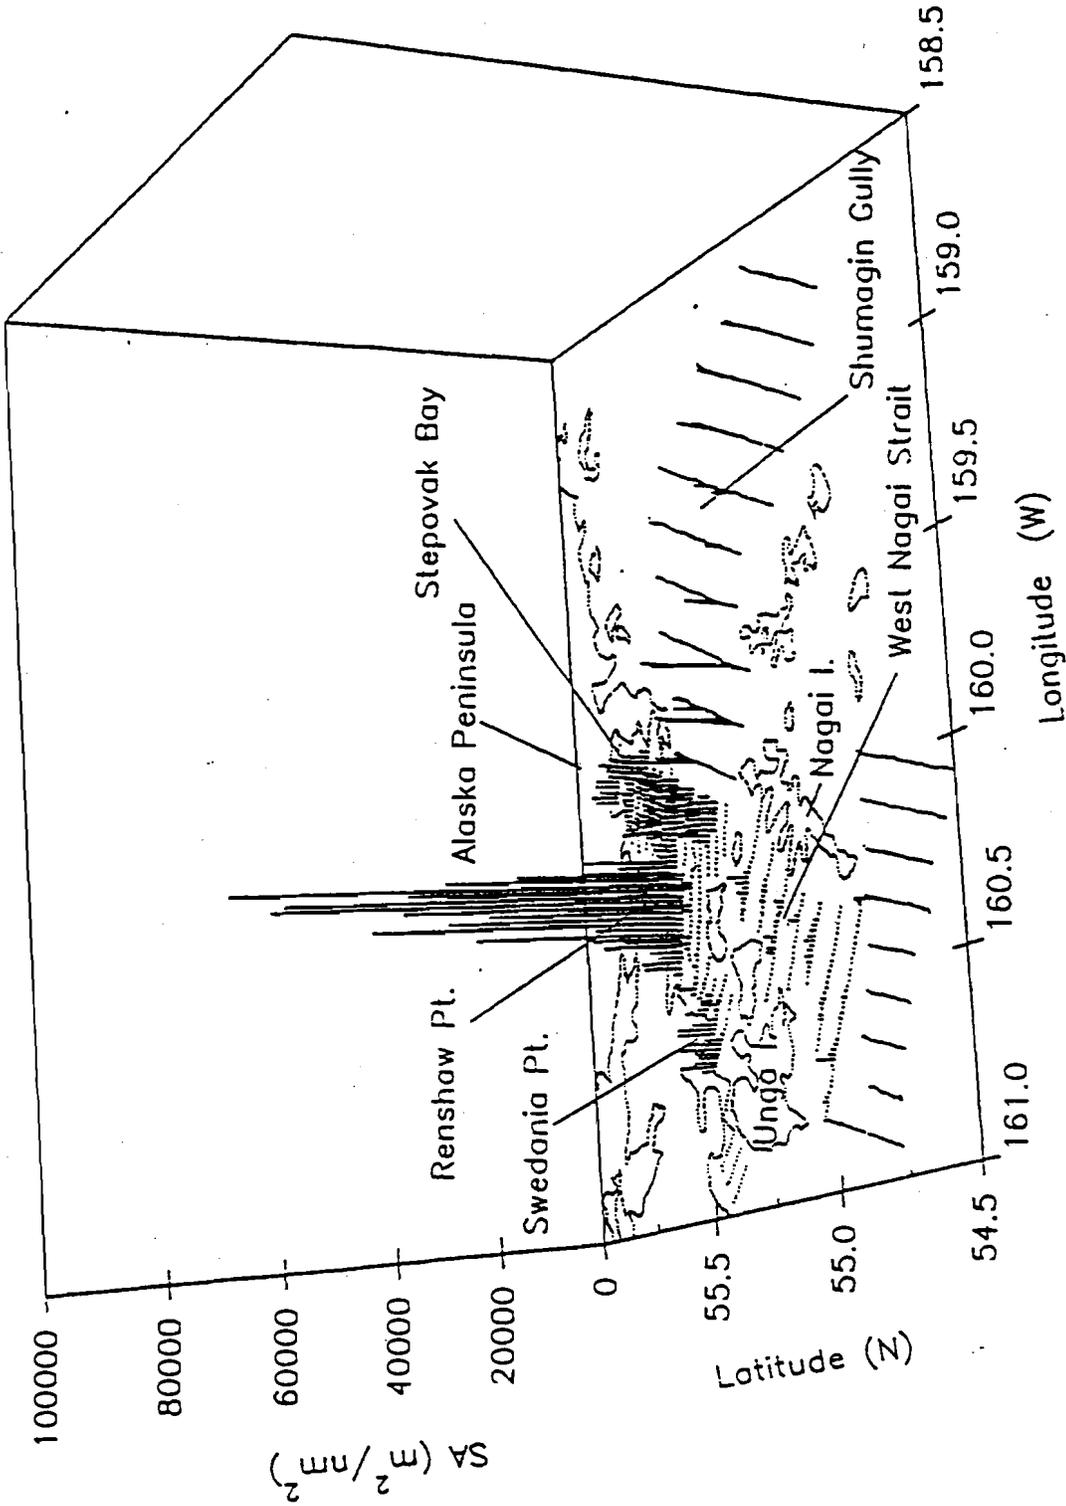


Figure 2. Acoustic backscattering (SA) attributed to pollock along transects during the winter 1995 echo integration-trawl survey of walleye pollock in the Shumagin Islands area, MF 95-01.

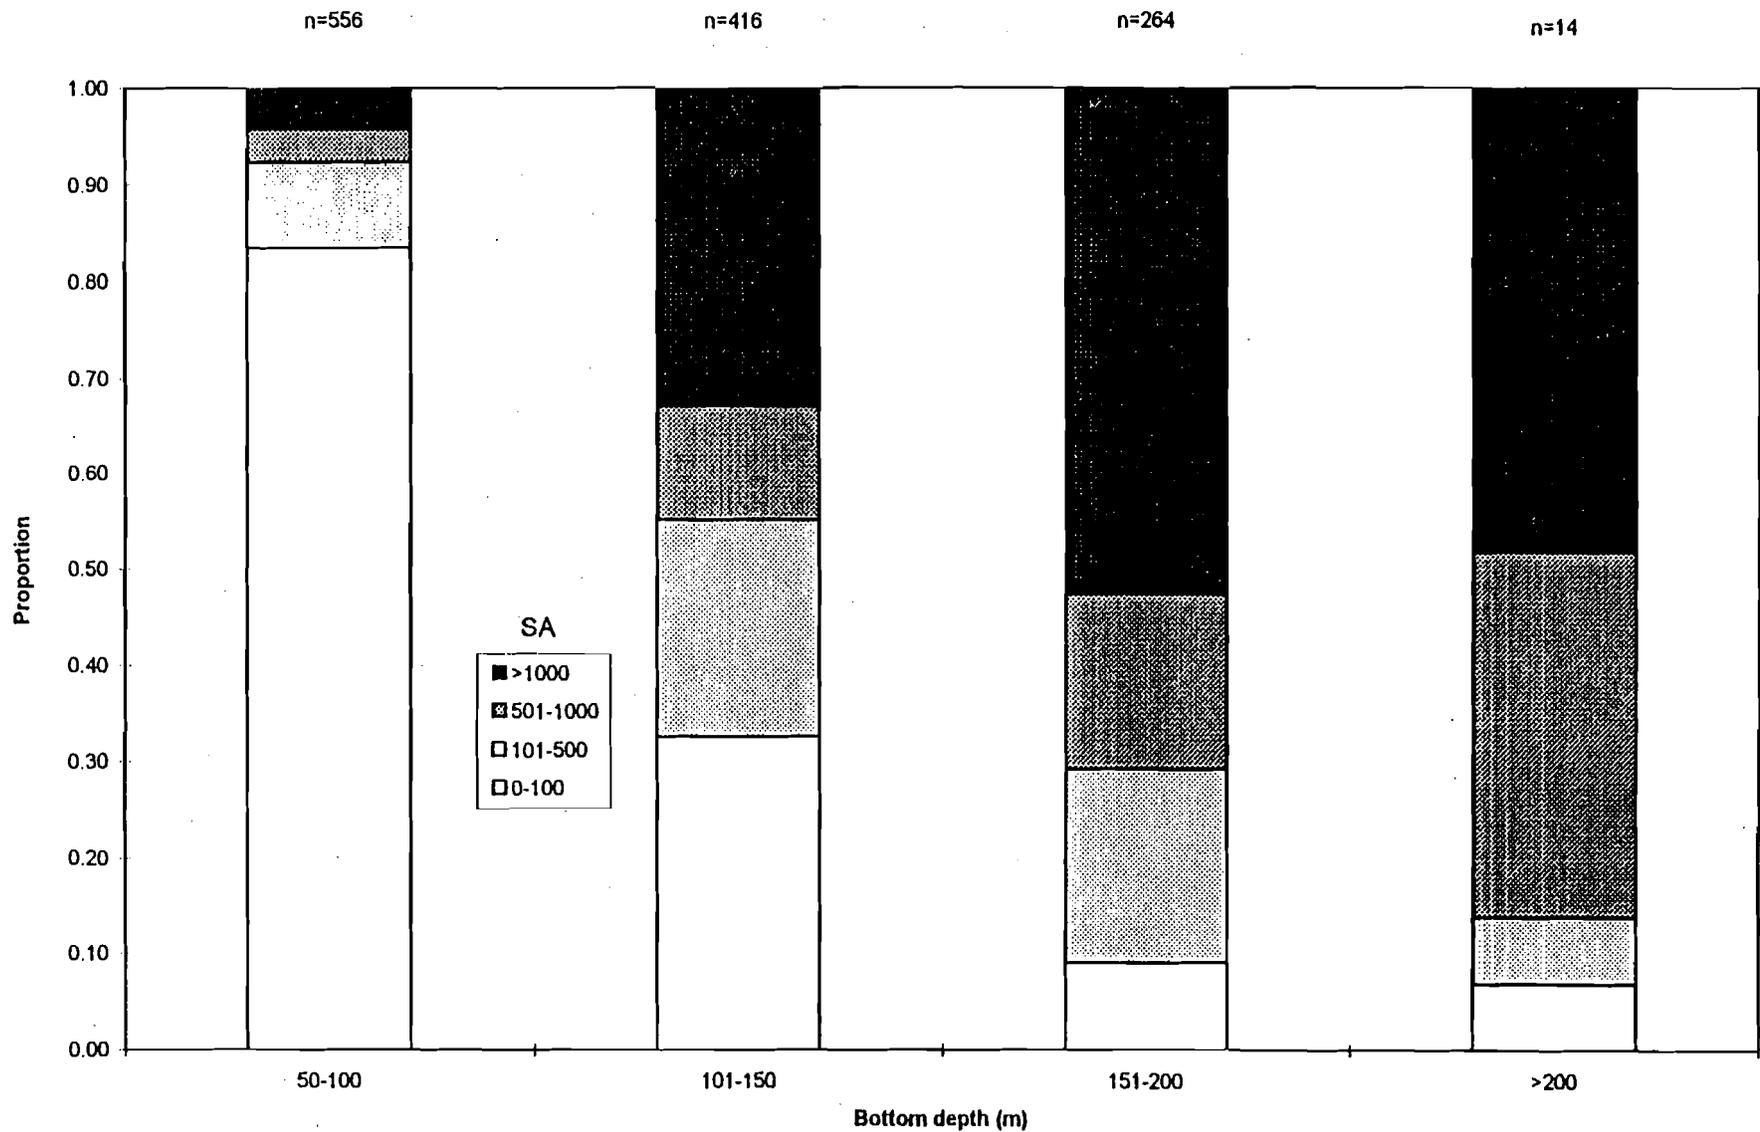


Figure 3. Total water column acoustic backscattering (SA) attributed to walleye pollock as a function of bottom depth during the winter 1995 echo integration-trawl survey of walleye pollock in the Shumagin Islands area, MF 95-01. Number above bar represents the number of 0.5 nmi data points in that bottom depth zone.

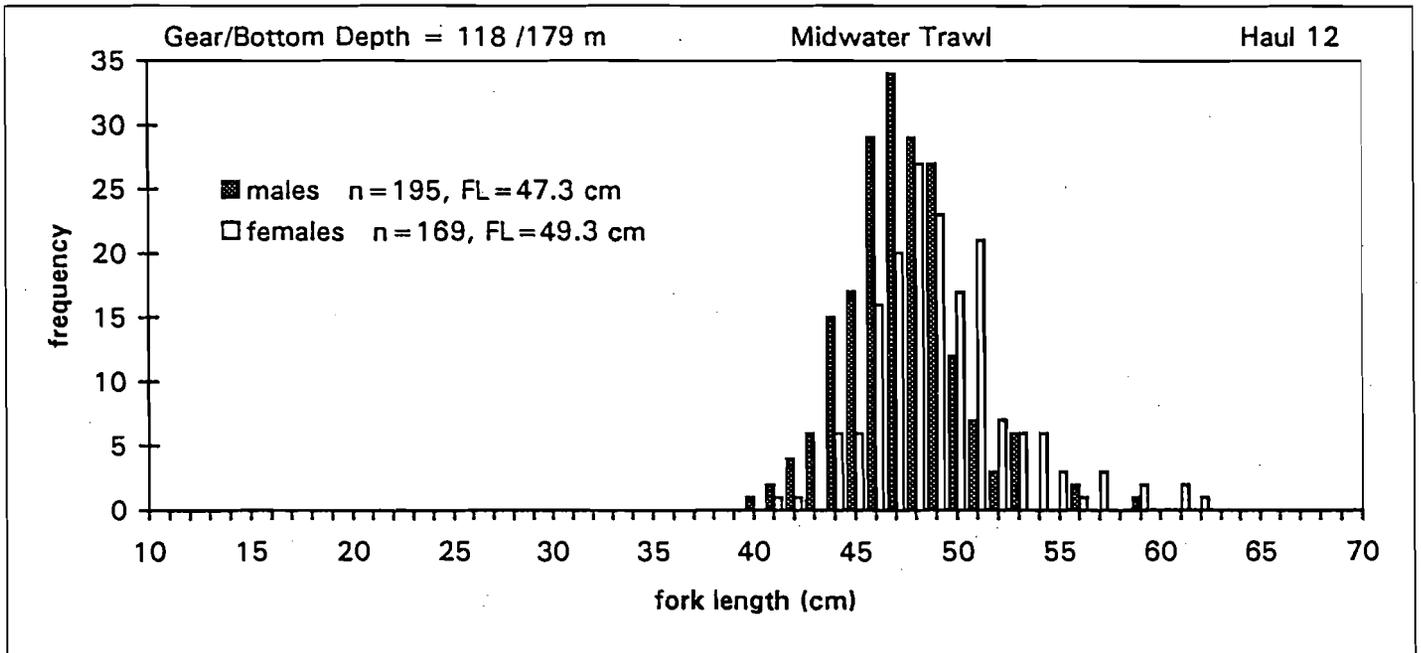
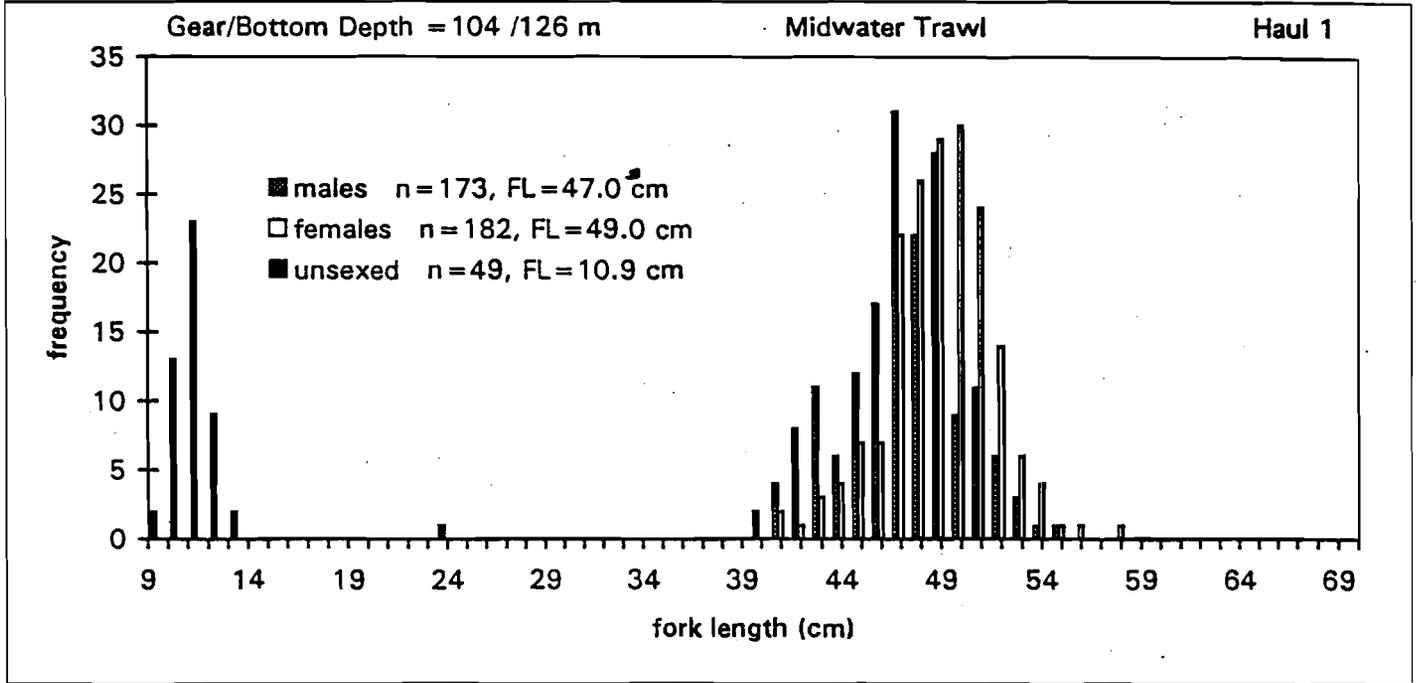


Figure 4. Typical walleye pollock size compositions from midwater trawl hauls (1, 12, and 14) and a bottom trawl (8) made during the winter 1995 echo integration-trawl survey of the Shumagin Islands area, MF 95-01.

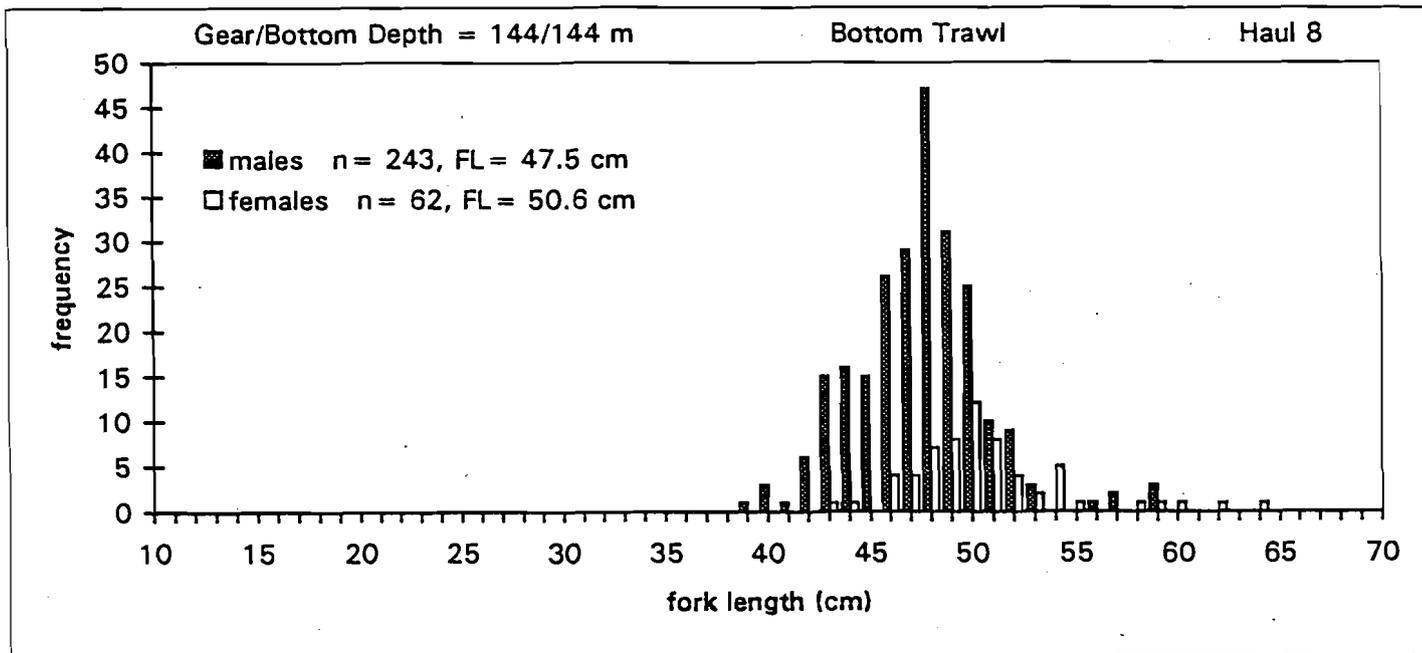
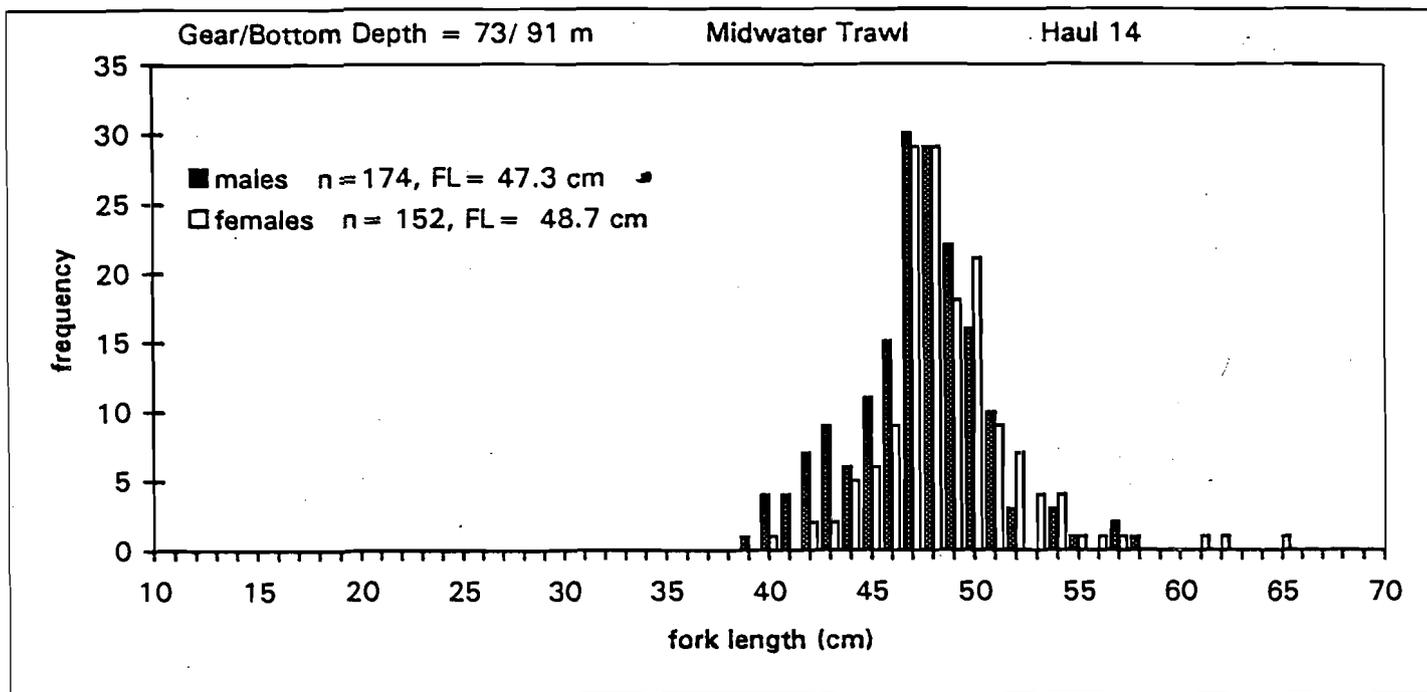


Figure 4 (cont.). Typical walleye pollock size compositions from midwater trawl hauls (1, 12, and 14) and a bottom trawl (8) made during the winter 1995 echo integration-trawl survey of the Shumagin Islands area, MF 95-01.

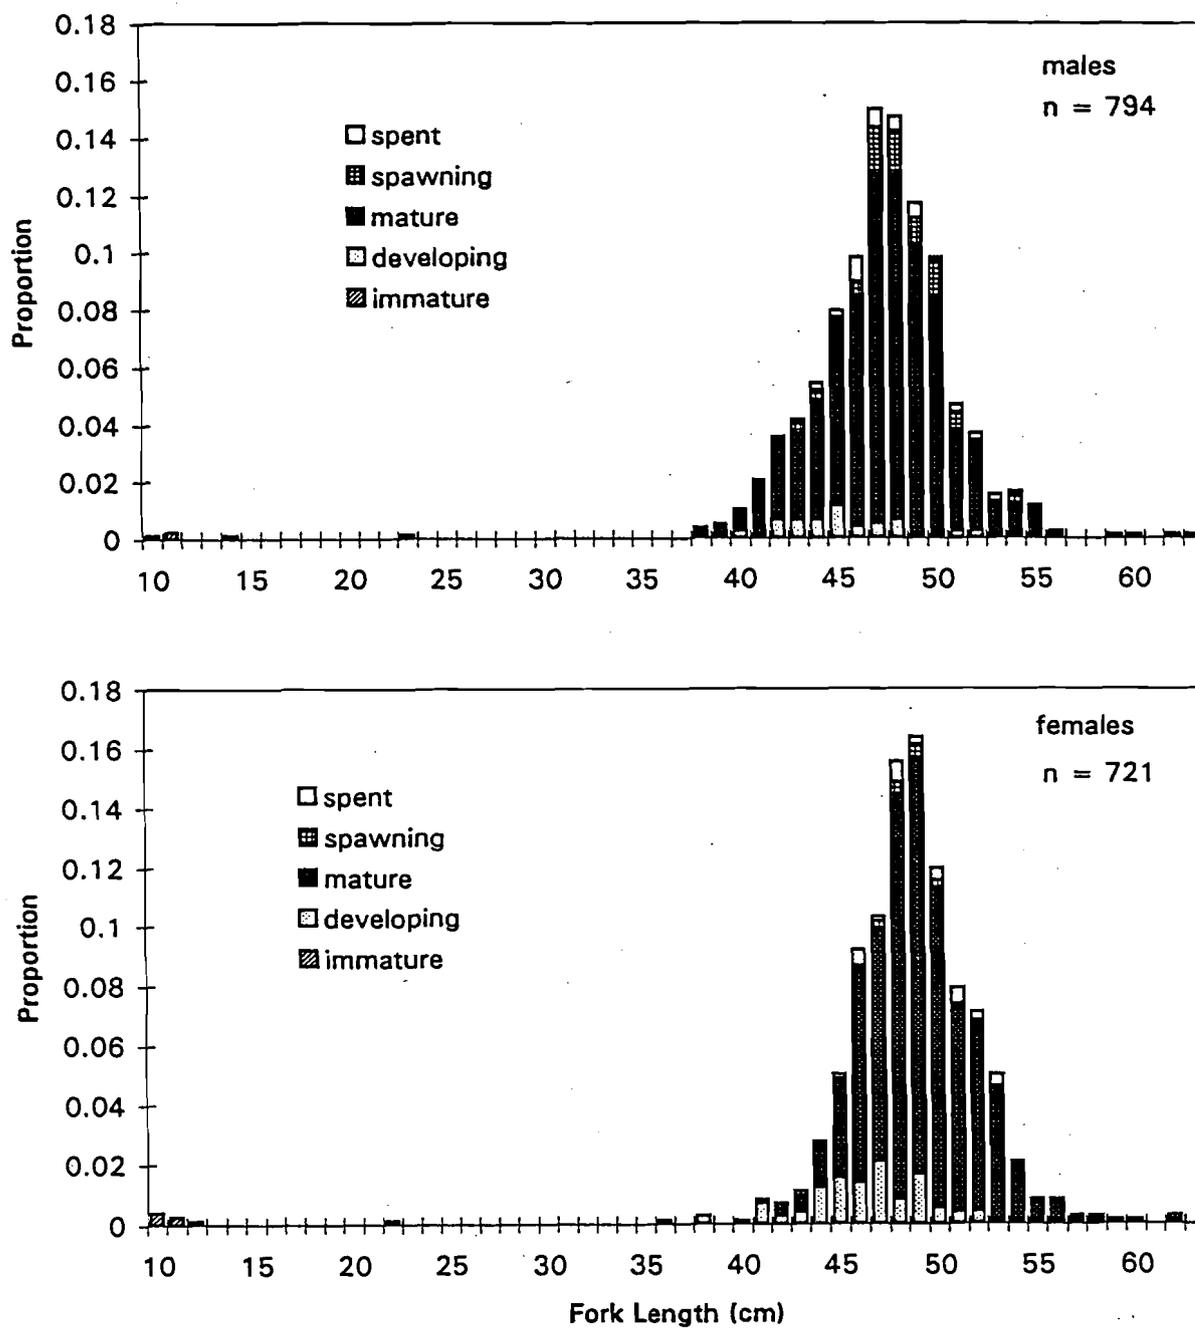


Figure 5. Maturity-length compositions for pollock obtained during the winter 1995 echo integration-trawl survey of walleye pollock in the Shumagin Islands area, MF 95-01. Relative proportion by size reflects the number of maturity samples collected and does not necessarily reflect the actual population size composition.

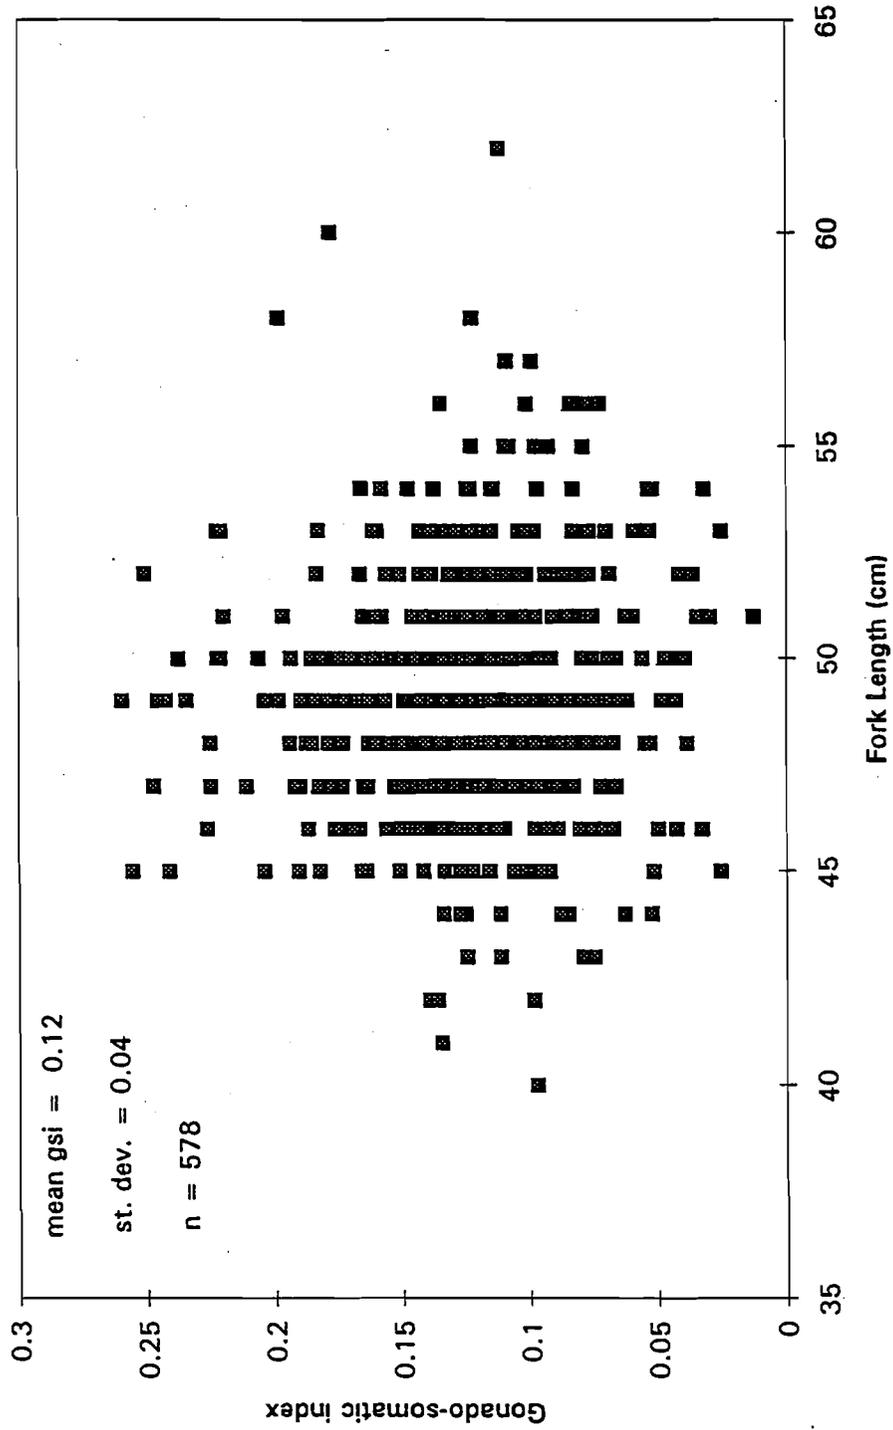


Figure 6. Gonado-somatic indices at length for mature female walleye pollock from the winter 1995 echo integration-trawl survey of the Shumagin Islands area, MF 95-01.